

Marine GPS Antenna

MODEL: MA-700L

Concinnity and Solid design for GPS Marine Antenna
with Advanced technology

Garmin compatible Marine GPS Antenna



GPS Antenna : 90.5mm(Dia) × 108.5mm(H)

MA700 is designed for the Marine Vessels mast or tall buildings that require long extra cables without signal constraint to the GPS receivers. **MA700L** is not only hidden in a durable and waterproof cover, but also cable is protected by a base which can prevent damage. The special design for **MA700** is really delicate, compact and reliable. Besides that have concinnity and compacted design for base. It is the integration of the high performance GPS patch antenna and a low noise amplifier into an extremely fully waterproof enclosure and when connected to a GPS receiver with 2.5~5.5VDC antenna power, it can provide excellent antenna signal amplification and out-band filtering with rejection for that receiver at 3V DC or 5V DC input Voltage.


Specifications	
Antenna Element	
Center Frequency	1575.42 MHz +/-1.023 MHz
Polarization	R.H.C.P. (Right Handed Circular Polarization)
Absolute Gain @ Zenith	+5 dBi typical
Gain @ 10° Elevation	-1 dBi typical
Axial Ratio	3 dB max.
Output VSWR	1.5:1 max.
Output Impedance	50 ohm
Low Noise Amplifier	
Center Frequency	1575.42 MHz +/- 1.023 MHz
Power Gain	28 +/-4.5dB
Bandwidth	2 MHz min.

Noise Figure	1.5 max.
Outer Band Attenuation	20 dB min. @ Fo +/-50 MHz
Supply Voltages	2.5 to 5.5V DC
Current Consumption	13mA@ 3.0V DC, 18mA@ 5.0V DC
VSWR	1.5 max.
Output Impedance	50 ohm
Overall Performance: (antenna element, LNA & coax cable)	
Center Frequency	1575.42 MHz
Gain	30 +/-4.5dB
Noise Figure	2.0 max.
Bandwidth	2 MHz min.
Axial Ratio	3 dB max.
VSWR	1.5 max.
Output Impedance	50 ohm
Environmental Conditions	
Operating Temperature	-30°C to +80°C
Storage Temperature	-40°C to +100°C
Relative Humidity	40% to 95% non-condensing
Water Resistance	100% waterproof
Physical Constructions	
Constructions	Enclosure Center feeds TNC connector for antenna output
Dimensions	Antenna : 90.5mm(Dia.) x 108.5mm(H)
Weight	150 grams (without cable)
Base mounting	FB3A SUS L-MOUNTING 1"-14 UNS
Cable & Connector	
RF	10 meter RG58/U connectors are hermetically molded plastics for waterproof and stain relief
Cable Pulling strength	12Kg for 5sec.
Connector available	TNC other types (optional)

* This specification is subject to change without prior notice

Data Updated: NOV 01, 2012



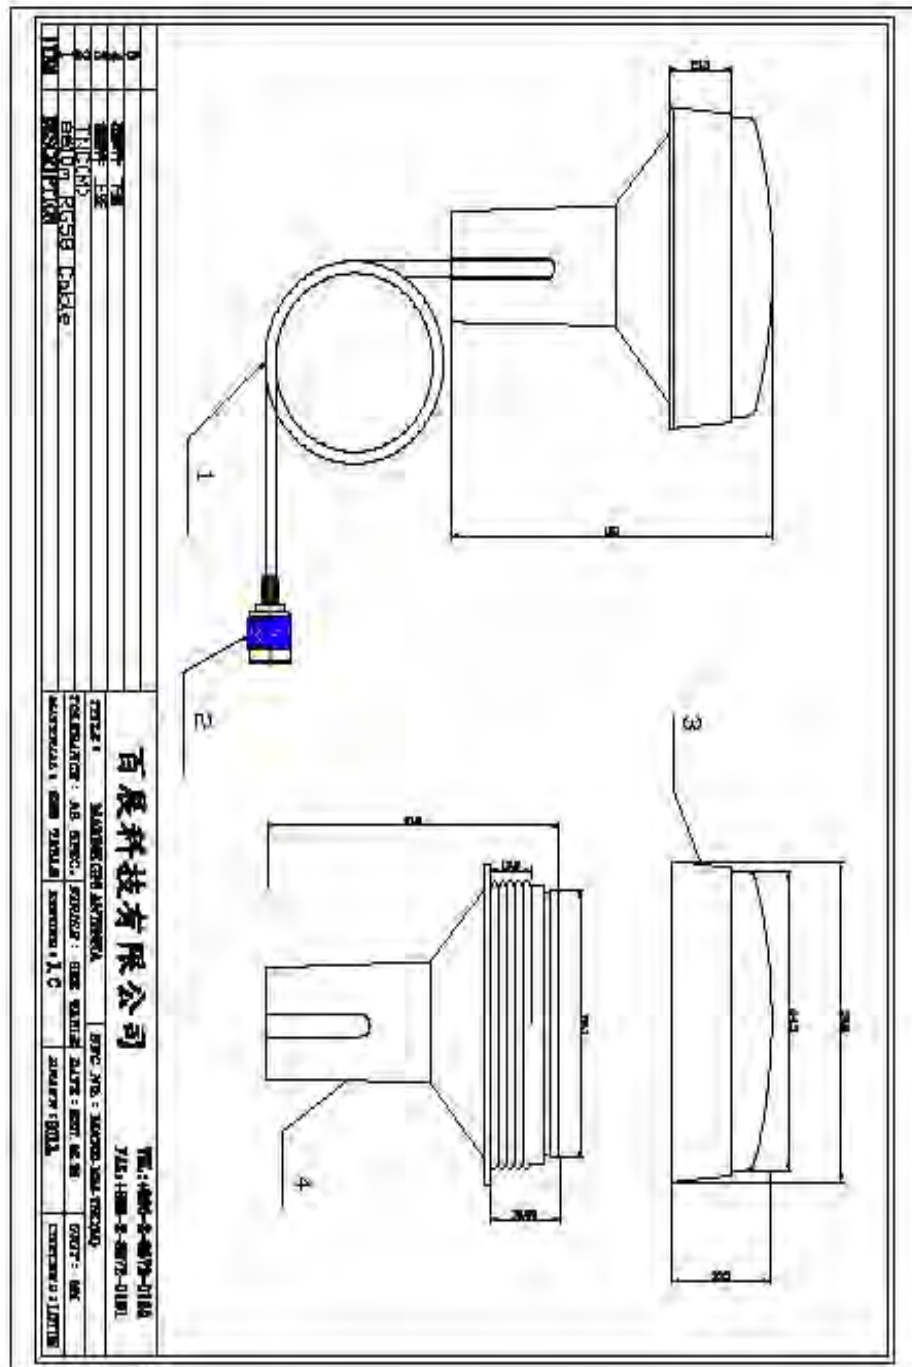

Marine Antenna Base mounting

MODEL: FB-3A



1"-14 UNS threaded mast SUS304/C3604

Locks on the truck rear-view mirror or on iron stand or flagpole

