

GSM ANTENNA

MODEL: TH-92

850/900/1800/1900 MHz ANTENNA



Specifications:

Frequency range:	GSM/850E	824~894MHz
	GSM	880~960MHz
	DCS	1710~1880MHz
	PCS	1850~1990MHz
Gain:	1.5 dB	
V.S.W.R:	2.0:1	
Impedence:	50 ohm	
Connector:	SMA(P)	
Dimension:	12(Dia.) × 106 (H) mm	
Weight:	>3g (With Connector)	

* This specification is subject to change without prior notice

Anritsu

MS4623B

MODEL:
DEVICE ID:

DATE: 05/07/07 16:31
OPERATOR:

Page 1


START: 0.010000000 GHz GATE START: -
STOP: 3.000000000 GHz GATE STOP: -
STEP: 0.007475000 GHz GATE: -
WINDOW: -

ERROR CORR: REFL PORT1
AVERAGING: 1 PT
IF BANDWIDTH: 1 KHz

-----CH1-----
PARAMETER: -S11-
NORMALIZATION: OFF
REFERENCE PLANE: 0.0000 mm
SMOOTHING: 0.0 PERCENT
DELAY APERTURE: -

S11 FORWARD REFLECTION TRANSMISSION/REFLECTION
CHN1
LOG MAGNITUDE REF=0.000 dB 10.000 dB/DIV

CH 1 - S11
REFERENCE PLANE
0.0000 mm

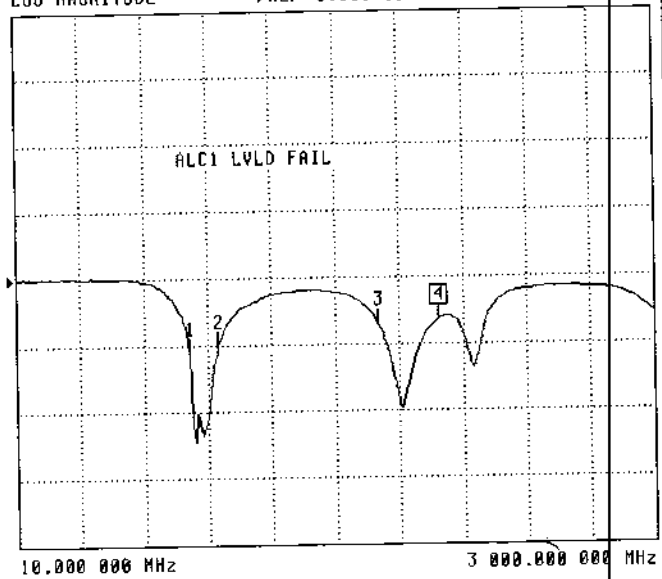

- 1: 824.000000 MHz
-11.270 dB
- 2: 960.000000 MHz
-10.154 dB
- 3: 1.710000000 GHz
-7.118 dB
- 4: 1.990000000 GHz
-6.431 dB

MARKER TO PEAK

MORE